


# LT30

## Power cell 30Ah



Providing our customers with high quality energy storage solutions for both transport & utility applications since 1909.

# Datasheet

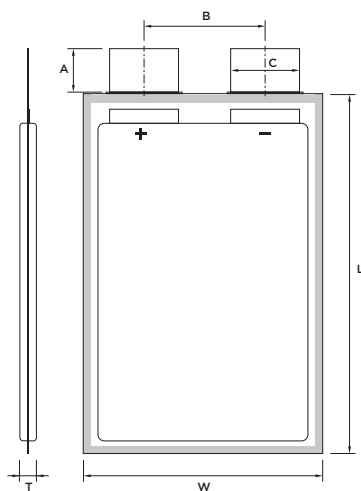

## Important Information

This datasheet contains typical information specific to products manufactured at the time of this publication and does not constitute a guarantee or warranty with respect to any cells and batteries. Cells/batteries performance and service life depends on the operating temperature, storage conditions, cut-off voltage and load applied in a specific application. It is the responsibility of each user to ensure that each application is adequately designed in terms of safety and usage conditions, and is in conformance with existing standards and requirements.

Specifications are subject to change without notice.

## Technical Data

Nominal Capacity	<b>30 Ah</b> (measured at C/10 discharge rate, RT)
Nominal Specific Energy	<b>65 Wh</b> (measured at C/10 discharge rate, RT)
Nominal Voltage	<b>2,2 V</b>
Voltage range	<b>1,5 V to 2,8 V</b>
Dimensions	Length (L) <b>285 mm ± 2 mm</b>
	Width (W) <b>178,5 mm ± 1 mm</b> (153 mm folded)
	Thickness (T) <b>12 mm +0,1/-0,5 mm</b>
Weight	<b>1080 g</b>
Volume	<b>475 ml</b>
Housing	<b>Foil packaging</b>
Tabs	<b>Aluminium (+ Pole), Ni-coated Copper (- Pole)</b>
	Length (A) <b>33 mm ± 3 mm</b>
	Distance (B) <b>90 mm ± 2 mm</b>
	Width (C) <b>50 mm ± 0,5 mm</b>
	Thickness <b>0,2 mm ± 0,02 mm</b>
Expected lifetime	<b>&gt; 15 000 cycles</b> (at 4C charge/discharge, full DoD and RT)
Energy density (gravimetric, volumetric)	<b>60 Wh/Kg, 135 Wh/l</b>

## Charge

Charging method	<b>CC/CV</b> (Constant Voltage with limited current)
Max. charge voltage	<b>2,8 V</b> (+0,05 V)
Max. charge current	<b>180 A (6C), 20s pulse 300 A (10C)</b>
End of charge	<b>U = 2,8 V and I &lt; C/10</b>
Max. temperature range	<b>-20°C to +55°C</b>

## Discharge

Max. discharge current	<b>180 A (6C), 20s pulse 300 A (10C)</b>
End of discharge Voltage	<b>1,5 V</b>
Max. temperature range	<b>-20°C to +55°C</b>

## Storage and transport

Max. temperature range	<b>-20°C to +25°C</b> for up to 1 year
	<b>+25°C to +40°C</b> for up to 3 months
	<b>+40°C to +60°C</b> for up to 1 week

### Leclanché SA (Headquarters)

Avenue des Sports 42  
CH - 1400 Yverdon-les-Bains  
Switzerland

### Leclanché GmbH

Industriestrasse 1  
D - 77731 Willstätt  
Germany

### Leclanché North America, Inc.

1920 Purdue Pkwy  
Suite 100  
Anderson, IN 46016, USA

[www.leclanche.com](http://www.leclanche.com)

[info@leclanche.com](mailto:info@leclanche.com)



**STATIONARY SOLUTIONS**



**e-TRANSPORT SOLUTIONS**



**SPECIALTY BATTERY SYSTEMS**

**WE ARE IN CHARGE**