


LT34

Power cell 34Ah



- High-power lithium-ion cell
- Ultra-high cycle and calendar life
- For transport and utility applications
- Precision manufactured in Germany

Datasheet

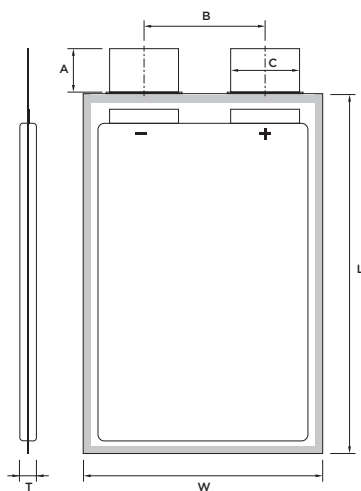

Technical Data

| | |
|--|--|
| Nominal Capacity | 34 Ah (measured at C/10 discharge rate, RT) |
| Nominal Energy | 75 Wh (measured at C/10 discharge rate, RT) |
| Nominal Voltage | 2,2 V |
| Voltage range | 1,5 V to 2,8 V |
| Dimensions | Length (L) 286 mm ± 1 mm Width (W) 178,5 mm ± 1 mm (152 mm folded) Thickness (T) 12 mm +0,1/-0,5 mm |
| Weight | 1080 g |
| Volume | 475 ml |
| Housing | Foil packaging |
| Tabs | Aluminium (+ Pole), Ni-coated Copper (- Pole) |
| | Length (A) 33 mm ± 1 mm Distance (B) 90 mm ± 1 mm Width (C) 50 mm ± 0,2 mm Thickness 0,3 mm ± 0,02 mm |
| Cycle Life | 20,000 cycles* (4C charge/discharge, at 80% DoD & RT) 15,000 cycles (4C charge/discharge, at 100% DoD & RT) |
| Energy density (gravimetric, volumetric) | 70 Wh/kg, 160 Wh/l |

Charge

| | |
|------------------------|--|
| Charging method | CC/CV (Constant Voltage with limited current) |
| Max. charge voltage | 2,8 V (+0,05 V) |
| Max. charge current | 204 A (6C), 20s pulse 340 A (10C) |
| End of charge | U = 2,8 V and I < C/10 |
| Max. temperature range | -20°C to +55°C |

Discharge

| | |
|--------------------------|--|
| Max. discharge current | 204 A (6C), 20s pulse 340 A (10C) |
| End of discharge Voltage | 1,5 V |
| Max. temperature range | -20°C to +55°C |

Storage and transport

| | |
|------------------------|--|
| Max. temperature range | -20°C to +25°C for up to 1 year +25°C to +40°C for up to 3 months +40°C to +60°C for up to 1 week |
|------------------------|--|

* Expected

Important Information

This datasheet contains typical information specific to products manufactured at the time of this publication and does not constitute a guarantee or warranty with respect to any cells and batteries. Cells/batteries performance and service life depends on the operating temperature, storage conditions, cut-off voltage and load applied in a specific application. It is the responsibility of each user to ensure that each application is adequately designed in terms of safety and usage conditions, and is in conformance with existing standards and requirements.

Specifications are subject to change without notice.

Leclanché SA (Headquarters)

Avenue des Sports 42
CH - 1400 Yverdon-les-Bains
Switzerland

Leclanché GmbH

Industriestrasse 1
D - 77731 Willstätt
Germany

Leclanché North America, Inc.

2685 Enterprise Dr
Anderson, IN 46013
USA

www.leclanche.com

info@leclanche.com



STATIONARY SOLUTIONS



e-TRANSPORT SOLUTIONS



SPECIALTY BATTERY SYSTEMS

WE ARE ENABLING THE ENERGY TRANSITION