


GL65

Energy cell 65Ah



- High-energy lithium-ion cell
- Very-high cycle and calendar life
- For transport and utility applications
- Precision manufactured in Germany

Datasheet

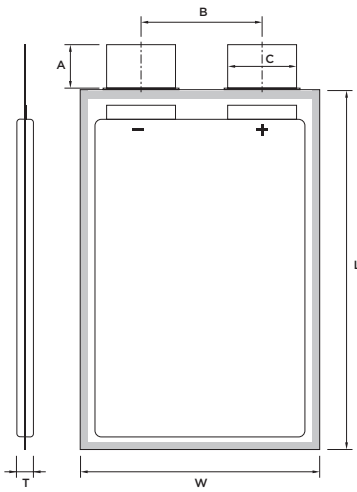

Technical Data

Cell chemistry	G/NMC (622)
Nominal Capacity (typical)	65 Ah (measured at C/10 discharge rate, RT)
Nominal Energy	245 Wh (measured at C/10 discharge rate, RT)
Nominal Voltage	3,72 V
Voltage range	3,0 V to 4,35 V
Dimensions	Length (L) 286 mm ± 1 mm
	Width (W) 178,5 mm ± 1 mm (152 mm folded)
	Thickness (T) 12 mm +0,5/-0,5 mm
Weight	1120 g
Volume	475 ml
Housing	Foil packaging
Tabs	Aluminium (+ Pole), Ni-coated Copper (- Pole)
	Length (A) 33 mm ± 1 mm
	Distance (B) 90 mm ± 1 mm
	Width (C) 50 mm ± 0,2 mm
	Thickness 0,3 mm ± 0,02 mm
Cycle Life	Up to 7000 cycles* (At 80% DoD) Up to 4000 cycles* (At 100% DoD)
Energy density (gravimetric, volumetric)	219 Wh/kg, 516 Wh/litre

Charge

Charging method	CC/CV (Constant Voltage with limited current)
Max. charge voltage	4,35 V
Max. charge current	65 A (1C), 20s pulse 195 A (3C)
End of charge	U = 4,35 V and I < C/10
Max. temperature range	0°C to +45°C

Discharge

Max. discharge current	195 A (3C), 20s pulse 260 A (4C)
End of discharge Voltage	3,0 V
Max. temperature range	-20°C to +55°C

Storage and transport

Max. temperature range	-20°C to +25°C for up to 1 year +25°C to +40°C for up to 3 months +40°C to +60°C for up to 1 week
------------------------	--

* Predicted. Dependent on specific charge conditions

Important Information

This datasheet contains typical information specific to products manufactured at the time of this publication and does not constitute a guarantee or warranty with respect to any cells and batteries. Cells/batteries performance and service life depends on the operating temperature, storage conditions, cut-off voltage and load applied in a specific application. It is the responsibility of each user to ensure that each application is adequately designed in terms of safety and usage conditions, and is in conformance with existing standards and requirements.

Specifications are subject to change without notice.

Leclanché SA (Headquarters)

Avenue des Sports 42
CH - 1400 Yverdon-les-Bains
Switzerland

Leclanché GmbH

Industriestrasse 1
D - 77731 Willstätt
Germany

Leclanché North America, Inc.

2685 Enterprise Dr
Anderson, IN 46013
USA

www.leclanche.com

info@leclanche.com



STATIONARY SOLUTIONS



e-TRANSPORT SOLUTIONS



SPECIALTY BATTERY SYSTEMS

**WE ARE ENABLING
THE ENERGY TRANSITION**