


GL65

Energy cell 65Ah



- High-energy lithium-ion cell
- Very-high cycle and calendar life
- For transport and utility applications
- Precision manufactured in Germany

Datasheet

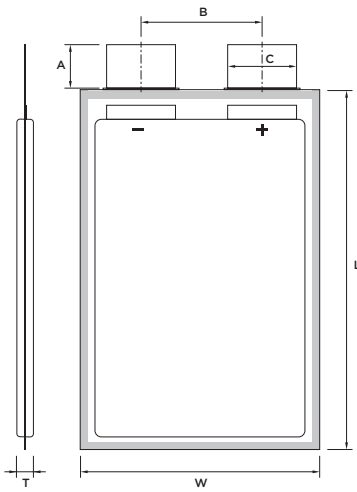

■ Technical Data

Cell chemistry	G/NMC (622)
Nominal Capacity (typical)	65 Ah (measured at C/10 discharge rate, RT)
Nominal Energy	242 Wh (measured at C/10 discharge rate, RT)
Nominal Voltage	3,72 V
Voltage range	3,0 V to 4,35 V
Dimensions	Length (L) 286 mm ± 1 mm
	Width (W) 178,5 mm ± 1 mm (152 mm folded)
	Thickness (T) 12 mm +0,5/-0,5 mm
Weight	1120 g
Volume	475 ml
Housing	Foil packaging
Tabs	Aluminium (+ Pole), Ni-coated Copper (- Pole)
	Length (A) 33 mm ± 1 mm
	Distance (B) 90 mm ± 1 mm
	Width (C) 50 mm ± 0,2 mm
	Thickness 0,3 mm ± 0,02 mm
Cycle Life	Up to 7000 cycles* (At 80% DoD) Up to 4000 cycles* (At 100% DoD)
Energy density (gravimetric, volumetric)	216 Wh/kg, 509 Wh/litre

■ Charge

Charging method	CC/CV (Constant Voltage with limited current)
Max. charge voltage	4,35 V
Max. charge current	120 A, 20s pulse 180 A
End of charge	U = 4,35 V and I < C/10
Max. temperature range	0°C to +45°C

■ Discharge

Max. discharge current	180 A, 20s pulse 300 A
End of discharge Voltage	3,0 V
Max. temperature range	-20°C to +55°C

■ Storage and transport

Max. temperature range	-20°C to +25°C for up to 1 year +25°C to +40°C for up to 3 months +40°C to +60°C for up to 1 week
------------------------	--

* Predicted. Dependent on specific charge conditions

Important Information

This datasheet contains typical information specific to products manufactured at the time of this publication and does not constitute a guarantee or warranty with respect to any cells and batteries. Cells/batteries performance and service life depends on the operating temperature, storage conditions, cut-off voltage and load applied in a specific application. It is the responsibility of each user to ensure that each application is adequately designed in terms of safety and usage conditions, and is in conformance with existing standards and requirements.

Specifications are subject to change without notice.

Leclanché E-Mobility SA (Headquarters)

Avenue des Découvertes 14 C
1400 Yverdon-les-Bains
Switzerland

Leclanché GmbH

Industriestrasse 1
77731 Willstätt
Germany

Leclanché North America, Inc.

2685 Enterprise Dr
Anderson, IN 46013
USA

Leclanché Norway

Karenslyst alle 53
0279 Oslo
Norway

www.leclanche.com

info@leclanche.com

**WE ARE ENABLING
THE ENERGY TRANSITION**



**STATIONARY
SOLUTIONS**



E-MOBILITY



**SPECIALTY BATTERY
SYSTEMS**